




Techbio Solutions' Clean Fone Class 100 is ideal for hands-free communication inside a clean room. The product's polyurethane cover resists particle accumulation and other chemicals. The Clean Fone is available in flush mount and wall mount models. Simple operation allows making calls via two programmable autodial buttons and accessing the full-function keypad for general purpose calling. Option for SOS calls during emergency and option for redialing the last number called available. Large sized buttons allow easy operation with gloved hands. The Clean Fone is designed to withstand wipe-down exposure to many chemicals typically used in sterile environments.

Technical Specification :

Line voltage	: 28V – 48V DC
Power supply	: 230 V AC
Temperature	: 0 to 70 C
Material	: SS304
Ringer sensitivity	: 40 – 100V AC
Dialing method	: DTMF

Dialing Frequency

Lower tone	: 697,770,852,941 Hz
Higher tone	: 1209,1336,1477 ,1633 Hz
Distortion	: <20 dB
Ringer output	: 70dB
Impedance	: 600 OHMS

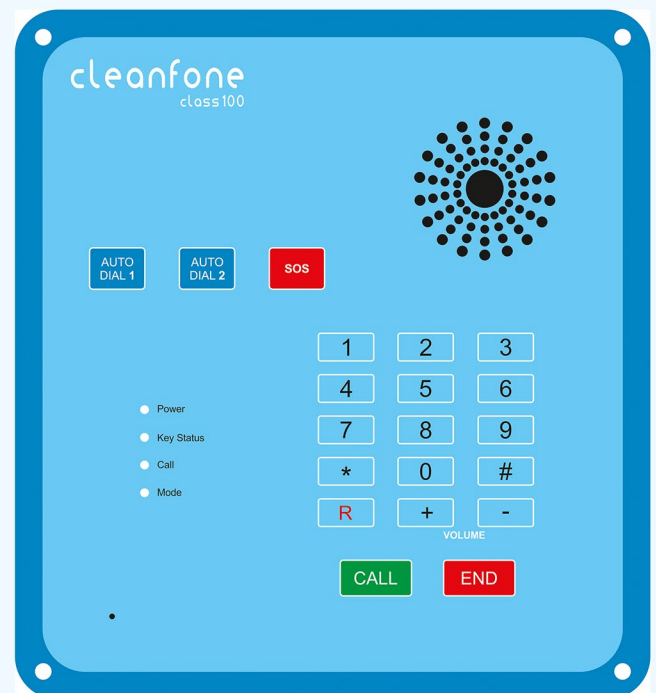

Features

- Auto dial programmable (2Nos.)
- Auto answering programmable
- Hands free communication to answer
- IPA washable front panel
- Dust proof enclosure
- Standard Flush/Wall mount
- Full duplex communication
- IP65 enclosure
- SS304 Cabinet